

The Philips logo is displayed in blue capital letters on a white background. The background of the entire slide is a photograph of a modern parking garage with a long, narrow luminaire fixture suspended in the air, angled towards the right. The garage has a concrete floor, white pillars, and several cars parked in the distance. A red pillar is visible on the left side of the frame.

Indoor Lighting

Pacific III

## Pacific III TCW099 \_ A Waterproof Luminaire

Functional impact-, dust- and water-proof luminaire for single and twin TL'D or TLED. PC Housing and cover of TCW099 are made of high-quality PC which has excellent impact resistant. Can be ceiling mounted or suspended. Easy maintenance,. Multiple size and multiple type for different application choice.

### Features and benefits

- **Dust-and moisture-proof, impact resistant: IP65/IK08**
- Easy installation and maintenance
- Luminaire is integrated and pre-wired
- Stainless steel toggles with certain anti-corrosion

### Applications

- General industry
- Car parks
- Dusty areas
- Wet & Moist areas
- Storage areas


# Specifications

Product		Pacific III _ TCW099			
General	Type	1xTL-D18W	1xTL-D36W	2xTL-D18W	2xTL-D36W
	For Lamp*	1xTL-D 18W	1xTL-D 36W	2xTL-D 18W	2xTL-D 36W
	Size (mm) L*W*H	675*105*107	1275*105*107	675*165*107	1275*165*107
	Weight (kg)*	1	1.6	1.5	2.3
	Tolerance	+/- 10%			
Electrical*	Input Voltage	220~240V / 50Hz			
	Power factor	> 0.9			
	Safety Class	Class I			
	Ballast	Embedded			
Mechanical	IP Rating	IP65			
	IK Rating	IK08			
	Connector	PG13.5 cable gland			
Operating temperature		- 10°C ~ +50°C			
Housing color		RAL 7035			
Lifetime		Refer to each ballast / driver			
Connect interface		Terminal block push -in			
Installation		Surface & Suspension (brackets accessory in package)			
Warranty		3 years			
Approbation		CCC / CB			


\* W/O type which do not include ballast, do not follow mentioned spec.

# Dimensional Drawing (units: mm)


## 1xTL-D18W

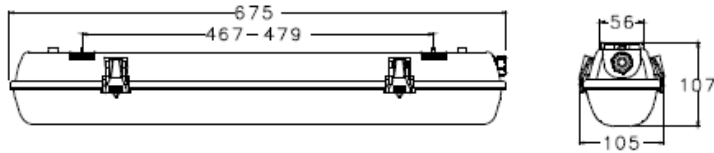


## 1xTL-D36W

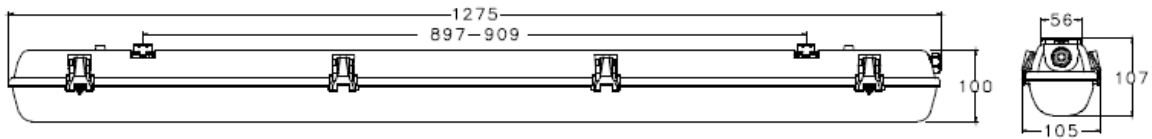

## 2xTL-D18W

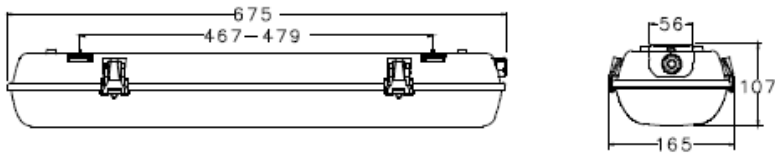

## 2xTL-D36W

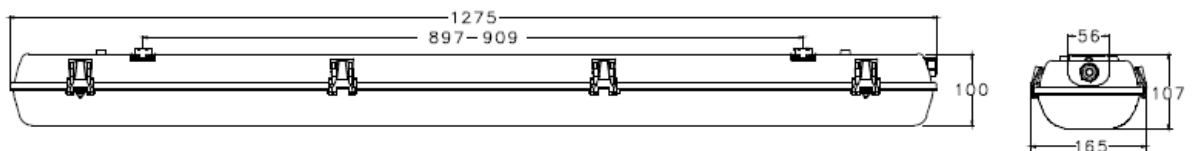

# Order Information

12NC	Description	For Lamp (not included)	Ballast (included)	MoQ	MPQ	Certification
911401526022	TCW099 1xTL-D36W HFS 220V 50Hz	1 x TL-D 36W	HF-S 136 TL-D II	6	6	CB
911401526122	TCW099 1xTL-D18W HFS 220V 50Hz	1 x TL-D 18W	HF-S 136 TL-D II	8	8	CB
911401526222	TCW099 2xTL-D36W HFS 220V 50Hz	2 x TL-D 36W	HF-S 236 TL-D II	4	4	CB
911401526322	TCW099 2xTL-D18W HFS 220V 50Hz	2 x TL-D 18W	HF-S 236 TL-D II	8	8	CB

© 2018 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

<http://www.lighting.philips.com>